

FORM PTO-1390  
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER  
**230.016**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

**10/088280**

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/SE00/01761

September 12, 2000

September 15, 1999

TITLE OF INVENTION **Method and Apparatus for Cleaning of a Milking Plant**APPLICANT(S) FOR DO/EO/US **Magnus Lidman**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371 (f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c)(2))
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).
  - a. ☐ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11 to 20 below concern document(s) or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 – 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:

**A copy of forms PCT/IB 301, 304, 306, 308 and 332**

| U.S. APPLICATION NO. <b>107088280</b><br>INTERNATIONAL APPLICATION NO. <b>PCT/SE00/01761</b>  | ATTORNEY'S DOCKET NUMBER<br><b>230.016</b> |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
|---|--|-------------------------------|--------------|--------------------|------|----|--------------|-----------|---|-----------|--------|--------------------|---------|---|-----------|--------|---|--|--|--|--------------------|------------------------------------|--|--|--|---------------|
| 21. <input checked="" type="checkbox"/> The following fees are submitted:<br><b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</b><br>Neither international preliminary examination fee (37 CFR 1.482)<br>nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO<br>and International Search Report not prepared by the EPO or JPO ..... \$1040.00<br>International preliminary examination fee (37 CFR 1.482) not paid to<br>USPTO but International Search Report prepared by the EPO or JPO ..... \$890.00<br>International preliminary examination fee (37 CFR 1.482) not paid to USPTO<br>but international search fee (37 CFR 1.445 (a)(2)) paid to USPTO ..... \$740.00<br>International preliminary examination fee (37 CFR 1.482) paid to USPTO<br>but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$710.00<br>International preliminary examination fee (37 CFR 1.482) paid to USPTO<br>and all claims satisfy provisions of PCT Article 33(1)-(4) ..... \$100.00<br><b>ENTER APPROPRIATE BASIC FEE AMOUNT = \$1040.00</b> |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30<br>months from the earliest claimed priority date (37 CFR 1.492(e)).  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:20%;">CLAIMS</th> <th style="width:20%;">NUMBER FILED</th> <th style="width:20%;">NUMBER EXTRA</th> <th style="width:20%;">RATE</th> <th style="width:20%;">\$</th> </tr> <tr> <td>Total claims</td> <td>19 - 20 =</td> <td>0</td> <td>X \$18.00</td> <td>\$ .00</td> </tr> <tr> <td>Independent claims</td> <td>3 - 3 =</td> <td>0</td> <td>X \$80.00</td> <td>\$ .00</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$270.00 \$ 0.00</td> </tr> <tr> <td colspan="4"><b>TOTAL OF ABOVE CALCULATIONS</b></td> <td>= \$ 1,040.00</td> </tr> </table>  |  | CLAIMS                        | NUMBER FILED | NUMBER EXTRA       | RATE | \$ | Total claims | 19 - 20 = | 0 | X \$18.00 | \$ .00 | Independent claims | 3 - 3 = | 0 | X \$80.00 | \$ .00 | MULTIPLE DEPENDENT CLAIM(S) (if applicable) |  |  |  | + \$270.00 \$ 0.00 | <b>TOTAL OF ABOVE CALCULATIONS</b> |  |  |  | = \$ 1,040.00 |
| CLAIMS  | NUMBER FILED                               | NUMBER EXTRA                  | RATE         | \$                 |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| Total claims  | 19 - 20 =                                  | 0                             | X \$18.00    | \$ .00             |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| Independent claims  | 3 - 3 =                                    | 0                             | X \$80.00    | \$ .00             |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| MULTIPLE DEPENDENT CLAIM(S) (if applicable)   |  |                               |              | + \$270.00 \$ 0.00 |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <b>TOTAL OF ABOVE CALCULATIONS</b>  |  |                               |              | = \$ 1,040.00      |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <b>SUBTOTAL</b> = \$1,040.00  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30<br>months from the earliest claimed priority date (37 CFR 1.49(f)).  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <b>TOTAL NATIONAL FEE</b> = \$1,040.00  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be<br>accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property + \$ .00  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <b>TOTAL FEES ENCLOSED</b> = \$1,040.00   |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:60%;"><b>Amount to be: Refunded</b></td> <td style="width:40%;">\$</td> </tr> <tr> <td><b>Charged</b></td> <td>\$</td> </tr> </table>   |  | <b>Amount to be: Refunded</b> | \$           | <b>Charged</b>     | \$   |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <b>Amount to be: Refunded</b>   | \$   |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <b>Charged</b>  | \$   |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| a. <input checked="" type="checkbox"/> A check in the amount of \$1,040.00 to cover the above fees is enclosed.<br>b. <input type="checkbox"/> Please charge my Deposit Account No. <u>50-1170</u> in the amount of \$ _____ to cover the above fees.<br>A duplicate copy of this sheet is enclosed.<br>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any<br>overpayment to Deposit Account No. <u>50-1170</u> . A duplicate copy of this sheet is enclosed.<br>d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card<br/>         information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| <b>NOTE:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR<br>1.137(a) or (b)) must be filed and granted to restore the application to pending status.   |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |
| SEND ALL CORRESPONDENCE TO:<br>David D. Stein<br>BOYLE, FREDRICKSON, NEWHOLM, STEIN & GRATZ S.C.<br>250 E. Wisconsin Ave., Ste. 1030<br>Milwaukee, WI 53202<br>414-225-9755<br>Fax: 414-225-9753  |  |                               |              |                    |      |    |              |           |   |           |        |                    |         |   |           |        |   |  |  |  |                    |                                    |  |  |  |               |

David D. Stein, Reg. No. 40,828

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as first class mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on the date indicated below.

*Rolyn Chui*  
Signature

*3/15/02*  
Date

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

|              |  |           |     |
|--------------|--|-----------|-----|
| Serial No.:  | not yet assigned   | Art Unit: | N/A |
| Filing Date: | 12 September 2000  | Examiner: | N/A |
|              | National Phase of PCT/SE00/01761                         |           |     |
| Inventor(s): | Magnus Lidman  |           |     |
| Title:       | <i>Method and Apparatus for Cleaning of a Milk Plant</i> |           |     |

**PRELIMINARY AMENDMENT**

Commissioner of Patents and Trademarks  
Washington, DC 20231

Dear Sir:

With regard to the claims presented in the above-identified application, please enter the following preliminary amendment before calculating any fees:

**In The Claims**

*Please substitute pending claims 5-7 with the corresponding amended claims as follows:*

5. The milking plant as recited in claim 4, wherein said cleaning fluid return pump has an output connected to a non-return valve, preventing fluid flow back into said cleaning fluid return pump.

6. The milking plant as recited in claim 5, wherein the cleaning fluid return pump is a centrifugal pump comprising an impeller connected to the air separator with the center of said impeller located immediately against said output of the air separator.

7. The milking plant as recited in claim 6, wherein said milk storage means comprises a milk cooling tank.

Please add the following new claims:

10. A milking plant used to collect milk from an animal comprising:
- a milk collector that receives milk from the animal;
  - a tank;
  - a milk conduit leading from the milk collector to the tank;
  - a cleaning fluid supply;
  - a cleaning fluid conduit connected to the milk conduit;
  - a valving arrangement having one setting that enables milk to flow from the milk collector through the milk conduit and another setting that allows cleaning fluid from the cleaning fluid supply to flow through the milk conduit;
  - a vacuum supply that applies a vacuum to prevent cleaning fluid in the cleaning fluid conduit from entering the milk conduit when the valving arrangement is set to enable milk to flow through the milk conduit.

11. The milking plant as recited in claim 10 wherein the milk collector comprises a milking station having a plurality of teat cups, the tank comprises a milk cooling tank, the milk conduit comprises a transport line through which milk can flow, the valving arrangement comprises a plurality of valves with one of the valves disposed in a closed position and another one of the valves disposed in an open position permitting flow of milk from the milking station to the milk cooling tank, and the one of the valves disposed in an open position and the another one of the valves disposed in a closed position permitting flow of cleaning solution through the transport line, and the vacuum supply comprises a milking vacuum system.

12. The milking plant as recited in claim 11 wherein cleaning fluid is introduced through the plurality of teat cups into the transport line to clean the transport line.

13. The milking plant as recited in claim 12 wherein the cleaning solution comprises a detergent.

14. The milking plant as recited in claim 10 further comprising a pump that draws cleaning solution out of the milk conduit.

15. The milking plant as recited in claim 14 further comprising an air separator disposed upstream of the pump and downstream of the milk conduit.

16. The milking plant as recited in claim 15 wherein the pump comprises a centrifugal pump and the vacuum supply applies the vacuum to the air separator.

17. The milking plant as recited in claim 15 further comprising a second pump disposed downstream of the air separator with one of the pumps comprising a milk pump that pumps milk from the air separator to the milk cooling tank and the other one of the pumps comprising a milk dump pump.

18. The milking plant as recited in claim 10 further comprising a separator in communication with the cleaning fluid conduit, wherein the milk collector comprises a milking station having a plurality of teat cups, the tank comprises a milk cooling tank, the milk conduit comprises a transport line through which milk can flow, the valving arrangement comprises a plurality of valves with one of the valves disposed in a closed position and another one of the valves disposed in an open position permitting flow of milk from the milking station through the milk conduit to the milk cooling tank, and the one of the valves disposed in an open position and the another one of the valves disposed in a closed position permitting flow of cleaning solution through the tank and into the cleaning fluid conduit, and the vacuum supply line comprises a milking vacuum system that is connected to the separator.


19. The milking plant as recited in claim 18 further comprising a second tank that holds milk when cleaning solution is introduced in the milk cooling tank and wherein the separator comprises an air separator.

REMARKS

This preliminary amendment is filed to eliminate multiple dependencies, to put the claims in better condition for allowance, and to present additional claims that better define applicant's invention. Early examination and allowance is respectfully requested.

The Commissioner is also authorized to charge payment of any fees associated with this communication or credit any overpayment to Deposit Account No. 50-1170.

Respectfully submitted,



David D. Stein  
Reg. No. 40,828

Dated: March 15, 2002  
BOYLE FREDRICKSON NEWHOLM STEIN & GRATZ, S.C.  
Suite 1030  
250 East Wisconsin Avenue  
Milwaukee, WI 53202  
Telephone: (414) 225-9755  
Facsimile: (414) 225-9753  
Attorney Docket No. 1174.118

VERSION WITH MARKINGS TO SHOW CHANGES MADE

Amended Claims

*Please substitute pending claims 5-7 with the corresponding amended claims as follows:*

5. The milking plant as recited in claim ~~3 or~~ 4, wherein said cleaning fluid return pump has an output connected to a non-return valve, preventing fluid flow back into said cleaning fluid return pump.
6. The milking plant as recited in claim ~~any of the claims 3-5~~, wherein the cleaning fluid return pump is a centrifugal pump comprising an impeller, connected to the air separator with the ~~centre~~ center of said impeller located immediately against said output of the air separator.
7. The milking plant as recited in ~~any of the preceding claims~~ claim 6, wherein said milk storage means comprises a milk cooling tank.



Rec'd PCT/PTO 15 MAR 2002

METHOD AND APPARATUS FOR CLEANING OF A MILKING PLANTTechnical field

The present invention relates to a milking plant for milking animals, such as cows, and preferably though not exclusively to plants comprising milking robots operating with vacuum to collect milk from the animals, wherein the milk is transported by a milk line system to a cooling tank. The invention relates particularly to the cleaning of milking equipment using a cleaning fluid such as water, or a detergent, flowing through the milk line system.

Background of the invention

In traditional milking with manual handling of the equipment a large number of cows are milked simultaneously one to four hours every morning and night. After each milking a manual adjustment is made wherein teat cups used to collect milk from the cows are placed on teat dummies. Rinsing water and later a detergent solution, is sucked from a washing machine through the teat dummies into the teat cups, and onwards through the milking equipment. The fluid transport is driven by a vacuum suction, for instance at an underpressure of 50 kPa, to a collecting chamber, usually called an end unit. Many different vacuum-driven milk transport arrangements have been disclosed, such as US 4,432,700, GB 2095088 and DE 3422452 by WESTFALIA SEPARATOR AG, and DE 2548601 by Miele, which are hereby incorporated by reference.

Generally, the end unit comprises a pump, transporting fluid against the pressure difference out towards the atmospheric pressure. The pipe connection, which during milking is connected to the cooling tank, is moved out of the cooling tank before washing, into a cleaning sleeve. The cleaning sleeve has an output, which is connected to the washing machine. A closed cleaning loop is thus obtained for cleaning in place (CIP). The technique known as CIP is inherited from the dairy industry, and is intended to indicate that rinsing water and detergent solution are circulated through tanks, pipes and process lines without the equipment having to be dismantled.

For the traditional milking equipment, a cleaning loop is formed by manually disconnecting the milk line system from the milk-cooling tank and connecting it to a cleaning fluid system. The milk tank itself is cleaned separately after having been emptied.

When using so called voluntary milking systems, VMS, the milking plant is in operation all hours of the day, having milk stored and transported through pipe systems and tanks. There are thus no natural breaks in the milking providing the opportunity to traditional cleaning or washing. This makes it necessary to divide

the milking plant into sub-systems, which are cleaned separately on different times. The only exception, which can be anticipated, is a common cleaning of the entire plants each time the cooling tank has been emptied. Since the tank is generally emptied with an interval of two days, the cleaning frequency is obviously  
5 inadequate.

As examples of such sub-systems, the following can be mentioned:

Teat rubbers are rinsed and sometimes disinfected between every cow that is milked. The water that is used must not leak into the milk.

The quality of the milk is supervised for each milked cow, generally by  
10 inspecting the so-called pre-milk, obtained from the teat cavity from the animal. If the milk does not meet up to standards, all the milk from the present cow has to be dumped. All parts of the equipment that has been in contact with the milk are washed afterwards.

The pipe system of the milk line system, comprising pipes and valves,  
15 transporting milk from the robot to the cooling tank, often about 20 to 30 meters, needs to be washed a couple of times each day in order to prevent bacterial growth on surfaces that have been in contact with the milk.

Between robot and milking tank there is often a milk filter that has to be  
20 changed or washed several times a day, at the same time as the filter housing is washed.

A VMS plant can consist of one milking station only, but for larger plants a number of stations are by necessity working in parallel, but which can be cleaned individually.

In some type of plants the cooling tank is washed separately after being  
25 emptied. The milk that is produced during the cleaning of the milking tank is then temporarily stored in a buffer tank. The buffer tank is emptied and washed once the cooling tank is taken back into operation.

The division into separately cleaned sub-systems provides a need for a security system preventing mixture of detergent solution into the milk even if a  
30 system separating valve should leak.

In dairy industries the same problem was earlier solved by removing a piece of pipe between parts of the equipment that were washed and parts that contained milk. A similar procedure is used in traditional milking plants. The connection pipe or hose, from the milk -line system to the milk cooling tank is moved  
35 manually to a cleaning fluid supply connection for washing.

When the demand for automation made manual pipe removing in dairy industries impossible an analogue solution was developed in the form of valves. System separating valves were used in doubles and were provided with a drained pipe extension in between. In practice, a closing valve was used combined with a

three-way valve. The latter opened for drainage of the intermediate pipe when the valves closed of the milk supplies. Later developments originating from the dairy industry has provided double seat valves with a different types of drained chambers between the seats. A drawback for the solutions provided for the dairy industry is that unwashed parts of the equipment are obtained between the sub-systems. The pipe system in a dairy is however enough extensive to provide possibility to shift between different sections so that also border zones are washed. For double seat valves of the "mixed proof" type one has often the possibility of washing and steam sterilising the mid chamber.

Milking plant systems, however, must for a foreseeable future, due to economical reasons if no other, be much simpler. Therefore the basic problem of preventing mixture of detergent into the milk has to be solved in another way.

#### Object of the invention

It is thus an object of the present invention to provide means and methods for cleaning of milking equipment in milking plants. More specifically it is an object to provide a safe and secure cleaning of the milk line system, with a low risk for detergent from the cleaning fluid to mix in with the milk, without the need of extensive piping or valve arrangement.

#### Summary of the invention

The present invention is directed towards the milking plant for milking animals, such as cows, wherein milk collecting means, preferably in the form of teat cups, are attached to the teat of the animal whereafter milk is taken from the animal by use of vacuum. The milk is transported by a milk line system to a milk storage means comprising a cooling tank in which milk from all, or at least several animals, is stored. For cleaning purposes the milk line system from each milking station, that is milk collecting means, can be shut of from the milk tank by valve means in order for separate cleaning of the milk line system. The invention is characterised by preventing any possible leakage of detergent from a cleaning fluid to the milk that has been collected in the milk tank, by providing a pressure difference between the two fluids.

The two fluids are mechanically separated by the said valve means, but there is a always a risk for a valve to leak. By applying a higher pressure on the milk then on the cleaning fluid, the cleaning fluid cannot penetrate into the milk in case of leakage. Milk however can of course leak out through the valve into the cleaning fluid. Although neither this is desirable, the damage is limited to a somewhat decreased result of washing and a smaller amount of lost milk. Furthermore, leakage of milk will give rise to a substantial colouring of the water or detergent

solution used as cleaning fluid, even at very low concentration, and is therefore easily spotted by suitable monitoring means. In a preferred embodiment of the invention, the pressure difference between the fluids is obtained by connecting the cleaning fluid to the vacuum supply of the milking plant.

#### Brief description of the drawings

For a better understanding of the invention and to show how the same may be carried into effect reference will now be made by way of example into the accompanied drawings of which

Figure 1 shows an air separator and a cleaning fluid return pump, with a connection to the vacuum system of the milking plant in accordance with the invention;

Figure 2 shows a preferred embodiment of the pump connected into the air separator, from figure 1, according to the invention;

Figure 3 shows the milk tank, parts of the milk line system and parts of the cleaning system in an embodiment of the present invention;

Figure 4 shows parts of another embodiment of the milking plant according to the invention, similar to that of figure 3;

Figure 5 shows parts of yet another embodiment of the present invention, in which the milking plant makes use of a buffer tank;

Figure 6 shows a part of a milking plant according to the invention, illustrating pump and valve arrangements around the end unit;

Figure 7 shows parts of the milking plant in an embodiment according to the invention, similar to that of figure 6 but with a single pump arrangement;

Figure 8 shows another embodiment of the invention, similar to that of figure 6.

Figure 9 shows an embodiment of the milking plant using a releaser instead of the milking pump.

#### Detailed description of preferred embodiments

During cleaning of milking equipment it is common to suck in and rinse water, alkali washing solution, sour washing solution and disinfection solution through the teat cups from a container at atmospheric pressure. The underpressure in the connection point, i.e. the washing shelf with the teat dummies, makes the connection easy: the teat cups hold on by suction and no cleaning fluid leaks out. This method has turned out to be reliable and is useful also for milking robots. The cleaning fluid container is generally comprised as a part of a washing machine. The cleaning fluid is sucked and pumped through the milking equipment to a connection point where it is to be returned to the cleaning fluid container, thereby obtaining a

circulation loop. In the vicinity of this connection point in a milking equipment, a system separating valve which must not leak is located. The system separating valve, which must be present, is placed between the milk transport line system (milk line system) and the milk-cooling tank. According to the present invention the risk for leakage of cleaning fluid into the milk is avoided by providing a pressure difference, so that the pressure of the cleaning fluid is lower than the pressure of the milk, on the respective sides of the system separating valve.

The pressure difference can be obtained either by raising the pressure on the milk side or by lowering it on the cleaning fluid side. A positive pressure on the milk side can be obtained by simply placing it high enough for the hydrostatic pressure in the connection point to provide sufficient security. This may however be inconvenient for other conceivable reasons. Another way of providing an increased pressure on the milk side is to use a pump directing the flow towards the system separating valve. Since the milk in the cooling tank is a delicate product, this is not a desirable solution. Neither is increasing the pressure in the cooling tank by pneumatic means, since the milk tank is fairly large.

The preferred procedure for obtaining the pressure difference, according to the invention, is instead to use the milking vacuum supply to lower the pressure on the cleaning fluid side in order to obtain the desired security against leakage. The return connection for the cleaning fluid must, with the proposed solution, have a return pump sucking the cleaning fluid at an underpressure and pumping it to the cleaning fluid container, which as mentioned is at atmospheric pressure.

The function of the return pump, or wash pump, is the same as for the end unit of the milking equipment, but the operational conditions are quite different. Milk requires delicate pumping without the mixture of air, where as for the case of cleaning fluid it is desirable to keep the volume in the pump equipment to a minimum in order to decrease the volume of the cleaning fluid. Thereby money is saved and the environmental stress is minimised. The desire to have a small cleaning fluid volume has a great impact for a VMS plant, which is washed several times a day. The flow of detergent solution, rinse water etc. which the return pump must handle is mixed up with air that is sucked into the cleaning loop. Figure 1 shows the return pump arrangement 1 in a proposed embodiment in the inventive milking plant. Due to the mixture of air in the cleaning fluid is provided an air separator 2 in immediate upstream connection with the return pump 6, which preferably is a centrifugal pump. The return flow of cleaning fluid enters the air separator at 3, and during transport in the air separator to the pump 6 inlet, any air present in the cleaning fluid rises to the free liquid surface and is thus released from the cleaning fluid. The milking vacuum system is connected to the air separator at

4, serving both as an air recipient of the air separator, and as an underpressure provider for the cleaning fluid loop. The connection to the vacuum system at 4 is preferably preceded by a substantially vertical part 5 with such inner surface and such inner arrangement that any fluid drops present in the air stream falls back into the air separator 2. When the return pump 6 is shut of the non-return valve 7 prevents suction back into the air separator. When the connection to the vacuum at 4 and a return valve at the inlet to the air separator 3 (not shown) are closed, the air separator is drained by means of a valve arrangement 8. Down-streams the non-return valve 7, the cleaning fluid is returned into a washing machine (not shown).

It is of outmost importance that the return pump arrangement has a larger capacity than the largest flow of cleaning fluid. Otherwise the air separator will cease to work and washing fluid will be sucked into the vacuum line. The air separator 2 and the return pump 6 will therefore often be emptied from cleaning fluid. The return pump 6 must thus be able to pump again once cleaning fluid flushes in. Centrifugal pumps of simple design have in these cases generally substantial start-up problems. Centrifugal pumps sucking in air-mixed flow of fluid separates the air in the central part of the pump. An air cavity is then obtained at the centre of the impeller of the centrifugal pump, so that only the outer portion of the pump house comprises a rotating ring of fluid. When the air cavity is large enough in diameter, the pump-work ceases completely. The amount of air that has to be collected before the pump ceases to work is dependent on the output pressure of the pump. It has, however, been found that an air separator connected directly to the pump inlet also has the ability to de-air the central part of the pump during operation.

Figure 2 shows a proposed embodiment of the pump 6 with an impeller 20, and its connection to the air separator 2, which is designed to secure the functionality of the pump even if a fluid with a high degree with mixed-in air is sucked in. When a pump of the proposed design has been emptied it will also start to pump immediately once new fluid is provided through the air separator. The proposed pump as illustrated in figure 2 thus makes it possible to work with a small volume of cleaning fluid and with sufficient over-capacity for the return pump.

Different embodiments of the milking plant according to the invention, comprising the return pump arrangement with the air separator as illustrated in figure 1, are shown in figure 3-5. The milk line system stretches from the milking robot, which is located at the milking stations where the animals are milked, to the milk room where the milk cooling tank is located. The milk line system from station to cooling tank is often about 20-30 meters long and needs to be washed 2-4 times a day, whereas the cooling tank generally is emptied and subsequently cleaned every two days. There are thus two main alternatives:

- a) The milk production is halted during the emptying and cleaning of the cooling tank. Therefore the entire milking plant is washed simultaneously.
- b) The milk flow is led to a buffer tank during emptying and cleaning of the cooling tank.

Figure 3 shows the milk-cooling tank 30, to which milk is supplied from the milk line system at 31. The cooling tank can be closed off from the milk line system by a valve 32, and a valve 33 is able to connect the milk line system with the return pump arrangement at the bottom of the picture. As previously described, the output of the return pump arrangements at 34 leads to the washing machine for the cleaning fluid. At the bottom of the cooling tank there is an output connection 35 for emptying the milk tank to a milk transport vehicle. This output connection may also be connected to the return pump arrangement by valve 36. At the top of the cooling tank a cleaning device 37 is shown, connectable to the cleaning fluid container (not shown) for cleaning the interior of the cooling tank.

During milk production valve 32 is opened and valve 33 is closed, so that milk from the milking robots is led from the milk line system 31 to the cooling tank 30 where it is stored until the milk transport vehicle arrives. In case the milk line system has to be cleaned although the milk tank is not emptied, valve 32 is closed and valve 33 is opened. In a manner as previously described the teat cups at the milking station are placed on cleaning fluid injectors comprising teat dummies, and the cleaning fluid is then sucked into the milk line system 31 and down through the air separator 2 and back to the washing machine by connection 34. Thanks to the connection 4 between the cleaning fluid system and the vacuum supply, the pressure on the cleaning fluid side of valve 32 is lower than the pressure of the milk side.

When the milk tank is to be emptied valve 32 is closed and then connection 35 is connected to a milk transport vehicle. At the same time valve 33 is opened in order to drain the milk line system through the return pump arrangement. After the milk tank has been emptied the connection 35 is closed, the cleaning device 37 in the cooling tank is activated and the cleaning fluid supplied therefrom is drained through the opened valve 36 to the return pump arrangement. Also the valves 32 and 33 are opened, capitalising cleaning of the entire milking equipment. During this stage there is no vacuum connection at 4 between the return pump arrangement and the milking vacuum supply, the circulation of the cleaning fluid only being driven by the return pump 6.

Another embodiment of the milking plant according to the invention is illustrated in figure 4. This is a simpler design of that in figure 3, in the sense that filling and emptying of milk to the cooling tank 40 goes through the same opening

41. During milking valve 42 is opened leading the milk line system 43 to the milk tank 40, whereas valve 44 to the return pump arrangement is closed. During washing of the milk line system only, and not the cooling tank, valve 42 is closed and valve 44 is opened. The connection 4 to the vacuum supply of the return pump arrangements is opened whereby the underpressure guarantees that no cleaning fluid leaks into the cooling tank by valve 42.

During emptying of the milk tank valve 42 is closed and the connection 41 of the cooling tank is connected to the milk transport vehicle. At the same time valve 44 is opened and the milk line system is drained through the air separator of the return pump arrangement. This may be, but does not have to be, aided by the air separator being connected to the vacuum supply at 4, or by opening the draining valve means 8.

Once the milk tank has been emptied the connection at 41 is closed and valves 42 and 44 are opened. Cleaning fluid supplied by the tank-cleaning device 45 is then drained through the air separator without using the vacuum connection at 4. Therefore, the return transport pump 6 is working with atmospheric pressure at the suction side.

Figure 5 shows another arrangement for a milking plant in accordance with b) above. In the illustrated arrangement, the flow of milk is led to a small buffer tank 50 during emptying and cleaning of the cooling tank 51. Once the cooling tank is back in use, the buffer tank is emptied by gravity feeding, simply by being placed in a elevated position relative the milk cooling tank 51. The buffer tank can be cleaned separately or together with the milk line system. Figure 5 shows an arrangement with separate cleaning, making use of the cleaning device 52 in the buffer tank 50, similar to the cleaning device 53 in the milk cooling tank.

During milk production milk is passed from the milking robot via the milk line system 54 through valves 55 and 56 to the cooling tank 51. Valves 57, 58 and 59 are during filling of the cooling tank closed. When the milk line system is washed only, valves 55 and 58 are held opened whereas valves 57, 56 and 60 are closed. The air separator is connected to the vacuum at 4 in order to secure that no cleaning fluid leaks into neither the cooling tank by valve 56 nor to the buffer tank 50 by valves 57 or 60.

When the cooling tank is full valves 56 and 60 are closed, whereas valve 57 is opened. The milk from the milk line system is then transported to the buffer tank 50. The connecting pipe 61 between the cooling tank 51 and the milk line system is then removed and the cooling tank is then connected to the milk transport vehicle by a connection at 62. When the cooling tank 51 has been emptied it has to be cleaned, and also during cleaning milk from the milk line system is



transported to the buffer tank 50. Valves 60 and 55 are thus still closed and valve 57 is opened.

Also valve 56 is closed whereas valve 58 is open. The air separator is connected to the vacuum supply at 4 during cleaning of the cooling tank, in order to prevent cleaning fluid to leak into the buffer tank. The connection 61 is re-installed and valve 59 is open so that cleaning fluid can be circulated in a tank cleaning loop by pump 63, thereby cleaning the cooling tank through means of the cleaning device 53. A separate cleaning fluid container and washing machine (not shown) is preferably provided in the tank cleaning loop. A drain valve (not shown) is also comprised in the tank cleaning loop, for dumping used cleaning fluid.

Once the milk-cooling tank is reinstated, valves 55, 56 and 57 are opened, leading milk both from the milk line system 54 and from the buffer tank 50 to the milk-cooling tank 51. Valves 60, 58 and 59 are closed, separating the cleaning fluid from the milk. Once the buffer tank 50 has been emptied through the force of gravity, valve 57 is closed and valve 60 is opened. Cleaning fluid is supplied to the buffer tank 50 through the cleaning device 52, and by use of the under pressure connected at 4 the cleaning fluid is drained by the return pump at the pressure that is lower than on the milk side of valves 57 and 58.

The embodiments of the invention as illustrated in the preceding figures 3-5 all show how the proposed procedure together with the proposed return pump arrangement for cleaning fluids can be used to prevent mixture of cleaning fluid into the milk. An important aspect of cleaning of milk equipment is to get rid of any residue of rinse water in the pipes and hoses of the milk line system. The risk for residual rinse water to be present when the milk production starts is especially large in the long transport lines from the milking station, i.e. the milking robot, to the cooling tank. Due to the length of such a connection it is difficult to arrange it with a constant fall towards the output end. With the proposed method and apparatus a possibility is provided to suck air through the milk line system to the air separator of the return pump arrangement, with a flow such that any residual rinse water is dragged out leaving a dry milk line system.

As previously mentioned, there is in vacuum milking equipment an air separating container usually called an end unit. To the end unit arrives a flow of air mixed milk from the teat cups of the milk station. The air is passed out through the end unit through the connection to the vacuum supply and a vacuum pump, whereas the milk is pumped out by means of milk pump.

In figure 6 there is an illustration of such an end unit 600 with connection 601 through which air mixed milk is supplied to the end unit 600. At the top of the end unit there is a connection 602 to the vacuum supply, by a liquid separator 603 divided to capture any drops of fluid flowing towards the vacuum at 602. The end

unit arrangement presented in figure 6 is provided with two pumps 604 and 605. Pump 604 is devised to pump milk from the end unit to the cooling tank and can be specially devised for gentle pumping. Pump 604 is of course also used for cleaning the subsequent milk line system at 606. Pump 605 is devised for milk that is to be  
5 dumped and for cleaning of the milking equipment. The system separating valves 607 and 608 are held fully opened in order to ensure that the pumps are filled with fluid at start-up. The non-return valves 609 and 610 are there to prevent back-suction and the draining valve 611 is devised to prevent cleaning fluid or rinse water to be retained in the pump 605, which could leak into the milk. The  
10 arrangement according to figure 6 with two pumps makes it possible to work with a high capacity cleaning pump 605, such as a centrifugal pump. During cleaning of the end unit, with valve 607 closed, pump 605 together with the vacuum connection 602 ensures that the pressure on the cleaning fluid side of 607 is lower than on the milk side.

15 Figure 7 shows an arrangement similar to that of figure 6, but with only one pump 702. The valve 701 connects the output from the valve 702 to the vacuum system. This connection can be made to the liquid separator 703 of the end unit 704, where potential leakage is taken care of. This arrangement can be combined with an air intake 705 with low capacity so that leaking fluid is guaranteed to be  
20 sucked out.

When cleaning the end unit 704 but not the subsequent milking equipment at 708, valves 701 and 702 are closed thereby obtaining an atmospheric pressure on the milk side (upper side) of valve 74. The lower side of valve 74 however is still in contact with the vacuum from the end unit 76, guaranteeing that no leakage of  
25 cleaning fluid occurs into the milk.

Figure 8 shows yet another embodiment of the present invention using an end unit 800. As previously described in conjunction with figure 6, the pump towards the milk tank 801, corresponding to pump 604 in figure 6, can be especially devised for pumping milk. Such a pump can be a positive displacement pump, for  
30 instance a peristaltic pump. When using such a peristaltic pump, with a good suction capacity, the arrangement can be simplified as illustrated in figure 8. Since the pump 801 is capable of suction even without being contained with milk or water at the start-up, the non-return valve 802 can be placed at the inlet of the pump 801. The non-return valve 802 then becomes the system separator during cleaning. The  
35 underpressure in the line from the end unit both provides sealing power to the non-return valve 802 and security towards leakage of cleaning fluid into the milk.

In order to lower the demands of the milk transport pump 801, the connection 803 of the end unit 800 to the vacuum supply can be provided with a three-way valve 804, so that the end unit only works with underpressure during

milking. After milking of each cow the valve 804 is adjusted so that air is let in whereby atmospheric pressure is obtained on the pre-milk surface. In accordance with the invention, valve 804 is of course adjusted to open the connection between the end unit 800 and the vacuum supply during cleaning of the end unit. This way  
5 leakage of cleaning fluid into the milk in the milk line system after the pump 801 is avoided, by means of the non-return valve 802.

Figure 9 shows an embodiment of the present invention using a so-called releaser instead of a milk pump. Such milk transport arrangements are well known in the prior art and have been used for a long time. In the displayed embodiment  
10 900 is a non-return valve in the milk line system 911. It is placed in immediate connection to the end unit 901. The mid chamber 902 of the releaser, "the lock chamber", is placed in the milk room above the cooling tank 903 and is provided with the non-return valve 904 for preventing back suction. The lock chamber 902 is vacuum provided in a well-known way by valve means 905, so that the milk can  
15 flow in from the end unit. When the valve 905 is adjusted so that the lock chamber is provided with atmospheric pressure, the non-return valve 900 closes towards the end unit 901 and the milk in the lock tank 902 is emptied into the cooling tank 903. Since only milk from one cow at the time flows into the end unit, and the entire milking procedure as well as the valve 905 is controlled by a central unit (not  
20 shown), the end unit 901 can after each finished milking be provided with atmospheric pressure by means of valve 906. Thereby the underpressure in 902 can also be used to lift and transport the milk.

When dumping milk that for some reason does not fulfil the demands on quality, and during cleaning, the pump 907 is used. The end unit 901 is then  
25 provided with vacuum, preventing mixture of cleaning fluid into the milk through lock chamber 902, by means of the non-return valve 900. When cleaning the milk line system and the lock chamber 902 of the releaser, the return pump 908 is preferably used in order to provide a continuous flow of fluid. In coherence what has been described for previous embodiments in conjunction with figures 3-5, the air  
30 separator 909 preceding the return pump 908 is connected to the vacuum at a connection 910 when there is milk present in the cooling tank and the milk line system is being cleaned.

Several embodiments and procedures for using those embodiments have been described in the proceeding text. Common for all embodiments is the  
35 inventive concept to use an underpressure provided by the vacuum supply of the milking plant, to the cleaning fluid in order to prevent cleaning fluid to leak into the milk when cleaning sub-units of the milk plant. in the context of the present invention the milk animal may of course be a cow, however, any other milk animal such as sheep, goat, horse or buffalo may also be intended.

100662601.0315002

## CLAIMS

1. A milking plant for milking animals, comprising milk collecting means,  
5 attachable to teats of said animals, a vacuum supply system, milk storage means, a  
milk line system connected to the collecting means and connectable to the milk  
storage means by milk storage valve means, selectively adjustable to prevent fluid  
communication between said milk line system and said milk storage means during  
cleaning of the milk line system, characterised by pressure regulating means,  
10 capable of arranging a lower fluid pressure in the milk line system than in the milk  
storage means, when said first valve means are closed.
2. The milking plant as recited in claim 1, further comprising cleaning means  
having a cleaning fluid supply, a cleaning fluid washer, a cleaning fluid return  
15 pump, and a cleaning fluid supply line system, connected to the milk line system  
and selectively capable of fluid communication therewith through cleaning fluid  
valve means, and connectable to the milk collecting means, thereby obtaining a  
closed fluid communicating loop.
3. The milking plant as recited in claim 2, further comprising an air separator with  
20 an intake connected to the cleaning fluid supply line system for return flow of  
cleaning fluid from the milk line system, an air outlet selectively connected to the  
vacuum supply system, and an output connected to the cleaning fluid pump.
4. The milking plant as recited in claim 3, wherein said air separator further  
25 comprises a cleaning fluid drainage valve.
5. The milking plant as recited in claim 3 or 4, wherein said cleaning fluid return  
pump has an output connected to a non-return valve, preventing fluid flow back into  
30 said cleaning fluid return pump.
6. The milking plant as recited in any of the claims 3 - 5, wherein the cleaning fluid  
return pump is a centrifugal pump comprising an impeller, connected to the air  
separator with the centre of said impeller located immediately against said output of  
35 the air separator.
7. The milking plant as recited in any of the preceding claims, wherein said milk  
storage means comprises a milk cooling tank.

8. A method for cleaning of a milking plant for milking animals, the milk plant comprising milk collecting means, attachable to teats of said animals, a, milk storage means, a milk line system connected to the collecting means and connectable to the milk storage means by milk storage valve means, selectively adjustable to prevent fluid communication between said milk line system and said milk storage means during cleaning of the milk line system, **characterised by the steps of**
- closing said milk storage valve means;
  - arranging a cleaning fluid circulation loop by connecting said milk collecting means and said milk line system to a cleaning fluid supply, and
  - arranging a lower fluid pressure in the cleaning fluid circulation loop than in the milk storage means.
9. The method as recited in claim 8, wherein the step of arranging a lower fluid pressure in the cleaning fluid circulation loop is obtained by connecting it to said vacuum supply system.






Fig. 1




Fig. 2

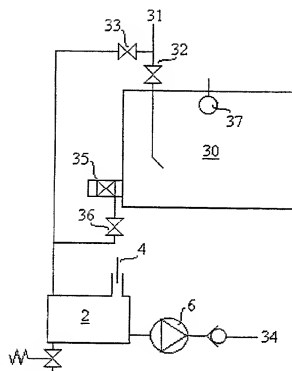


Fig. 3




Fig. 4



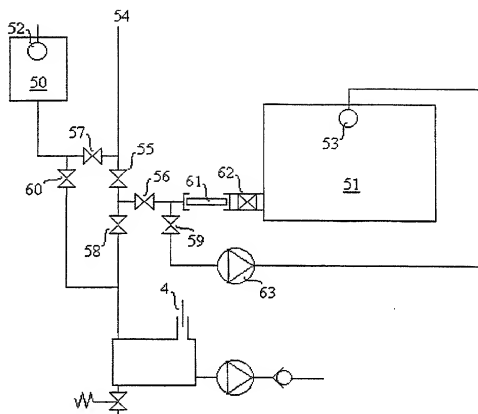


Fig. 5

10088280-031502  
200105-08288001

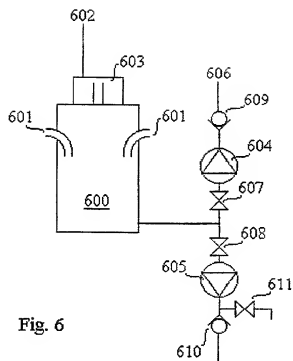


Fig. 6




Fig. 7

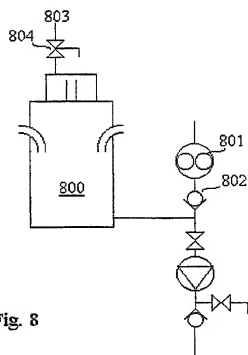


Fig. 8

1008280-034502

# DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND APPARATUS FOR CLEANING OF A MILKING PLANT, which is described and claimed in

- ☐ the attached specification.  
☐ the specification in application \_\_\_\_\_, filed on \_\_\_\_\_ and amended on \_\_\_\_\_ (if applicable).  
☒ international (PCT) application No. PCT/SE00/01761, filed on 12 September 2000 and as amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to be material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

## Prior Foreign Application(s)

| SE 9903288-0<br>(Number) | Sweden<br>(Country) | 15 September 1999<br>(Day/Month/Year Filed) | Priority Claimed<br><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
|--------------------------|---------------------|---|---|
| _____<br>(Number)        | _____<br>(Country)  | _____<br>(Day/Month/Year Filed)             | <input type="checkbox"/> Yes <input type="checkbox"/> No                                |
| _____<br>(Number)        | _____<br>(Country)  | _____<br>(Day/Month/Year Filed)             | <input type="checkbox"/> Yes <input type="checkbox"/> No                                |

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is known to be material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT International filing date of this application.

|                               |                        |  |
|-------------------------------|------------------------|--|
| _____<br>(Application Number) | _____<br>(Filing Date) | _____<br>(Status - Patented, Pending, Abandoned) |
| _____<br>(Application Number) | _____<br>(Filing Date) | _____<br>(Status - Patented, Pending, Abandoned) |

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: James F. Boyle, Reg. No. 33,653; Timothy E. Newholm, Reg. No. 34,400; David D. Stein, Reg. No. 40,828; Michael J. Gratz, Reg. No. 32,693; Mary E. Eberle, Reg. No. 43,599; Peter C. Stomma, Reg. No. 36,020; Andrew S. McConnell, Reg. No. 32,272; and Mathew E. Corr, Reg. No. 45,434.

Address all telephone calls to David D. Stein at telephone number (414) 225-9755, facsimile number (414) 225-9753.

Address all correspondence to: David D. Stein  
BOYLE, FREDRICKSON, NEWHOLM, STEIN & GRATZ, S.C.  
250 Plaza, Suite 1030  
250 East Wisconsin Avenue  
Millwaukee, Wisconsin 53202

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name): Magnus Lidman

Inventor's signature: Magnus Lidman Date: \_\_\_\_\_  
 Residence: Rönninge, Sweden Citizenship: Sweden  
 Post Office Address: Fruängsvägen 20  
SE-144 64, Rönninge, Sweden